

## Air Handling Unit RoomAir



Simple, quiet, efficient



- 50 mm panel with mineral wool insulation
- high efficient counter flow heat exchanger
- by-pass function
- temperature efficiency > 90%
- 2 direct driven fans (EC motor)
- supply filter class F7
- exhaust filter class G4
- sound attenuators on supply and exhaust air
- nominal airflow 900 m<sup>3</sup>/h
- plug & play unit with control system
- optionally with CO<sub>2</sub> sensor


# Air Handling Unit RoomAir

## Application:

Unit is designed for schools, kindergartens, offices, conference rooms, etc...

## Technical data:

- length: 1160 mm
- width: 610 mm
- height: 2680 mm
- max air flow: 900 m<sup>3</sup>/h
- nominal power: 0,510 kW
- sound pressure level: Lp = 38 dB(A) at distance 1m
- nominal voltage: 1x230/50 V/Hz
- nominal current: 3,15 A

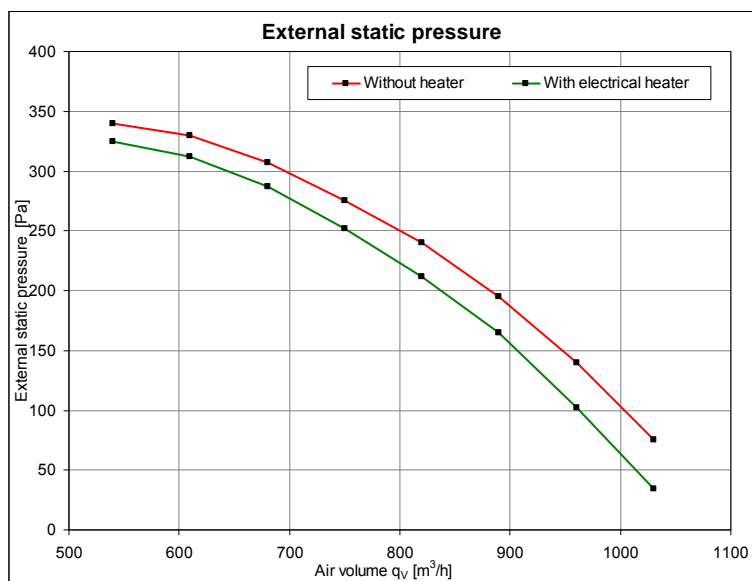

Hidria IMP Klima d.o.o.  
Godovič 150, 5275 Godovič  
Slovenia  
T: +386 5 37 43 000  
F: +386 5 37 43 082  
E: klima@hidria.com  
www.hidria.com